

6450 Pneumatic Hand Control



Technology Ltd


- Large soft buttons
- Ergonomic design for comfort
- Light operating force
- Choice of curly or straight tubing
- Various colour & ident options
- Inherently waterproof
- For use with 6871 & 6872 airswitches



General Specifications

Standards/approvals	n/a
Degree of protection	n/a
Connection method	1.5mm I/D tube for use with airswitches with 2mm spouts
Electrical rating	n/a
Contact configuration	n/a
Pressure range	n/a
Operating temperature range	-5°C to +40°C with temperature compensated airswitches
Body material	Thermoplastic
Weight	135 g approx.
Additional information	Various attachment methods and labels available

Reference Dimensions in mm

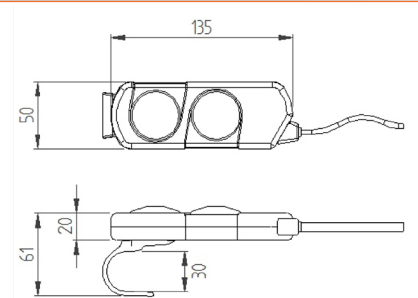

Ordering and options

6450 - [] [] [] [] - [] [] [] []

Model	[] [] [] [] - [] [] [] []
Body colour -	A Grey B Black
Body -	A With moulded Herga logo D With blank recess B With printed Herga logo E Without label recess C With printed operation logo (select from options below)
Operation label options -	A Bed motif - Head up/down B Bed motif - Bed up/down C Bed motif - Legs up/down D Arrows - up/down Z No label required
Button colour -	A Grey B Blue C Black D White E Red F Green
Button labelling -	A Plain buttons B Buttons with embossed arrows
Tube type -	A Grey twin polyurethane 1.5 mm bore B Grey twin polyurethane curly coil C Grey twin 1.5 mm with round socket D Grey twin curly coil with round socket
Tube length -	A 2 metres B 3 metres F Curly coil - unstretched 0.9 m, stretched 2.4 m
Fixtures -	A With hook B With suction cup Z No fixtures



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice